

# FLOS

F1801044 Anodized Champagne

## Coordinates Floor

Designed by Michael Anastassiades, 2020


57W - 3240lm - 2700K - CRI> 95



Coordinates Floor is a floor lamp with diffuse light composed of two vertical poles that can be oriented during installation, attached to a base with an anodized aluminium cover. Each element is made of extruded anodized aluminium with a champagne finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Usable power cable length 260 cm with pedal dimmer switch for ON/OFF and adjustable brightness 10–100%. Power supply attached to interchangeable plug.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



### Main specifications

EAN	8059607031223
Mounting	Floor
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	57
System flux (lm)	3240

### Physical

Colour	Anodized Champagne
Net weight (kg)	9.2
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.03
IP internal	20

### Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

### Photometric Files

ULD	↓ ZIP
LDT / IES	↓ LDT

### Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



## Photometric

Lighting type	Indirect, Direct
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95

## Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240/48
LED voltage Vf (Vdc)	null
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

## Spare Parts

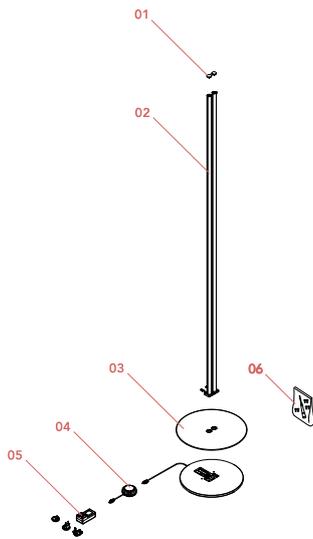

- |     |   |           |
|-----|---|-----------|
| 01. | Assembly Body Fixing for<br>Coordinates F Anodized<br>Champagne | RF29550   |
| 02. | Coordinates F Body  | RF1800044 |
| 03. | Coordinates F Cover Base  | RF31891   |
| 04. | Switch dimmer 48v pmw 500hz                                     | RF27549   |
| 05. | Black plug assembly kit & 48V<br>driver                         | RF3320400 |

**DOWNLOAD**



RF29550  
Assembly Body Fixing for  
Coordinates F Anodized  
Champagne



RF1800044  
Coordinates F Body



RF31891  
Coordinates F Cover Base



RF27549  
Switch dimmer 48v pmw 500hz



RF3320400  
Black plug assembly kit & 48V  
driver

# FLOS

F1801033 Argent

## Coordinates Floor

Designed by Michael Anastassiades, 2020


53W - 3049.4lm - 2700K - CRI> 95



Coordinates Floor is a floor lamp with diffuse light composed of two vertical poles that can be oriented during installation, attached to a base with an anodized aluminium cover. Each element is made of extruded anodized aluminium with a champagne or argent finish and a diffuser in platinum optical silicone with an integrated LED strip (CRI 95). Usable power cable length 260 cm with pedal dimmer switch for ON/OFF and adjustable brightness 10–100%. Power supply attached to interchangeable plug.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



### Main specifications

EAN	8059607039830
Mounting	Floor
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	53
System flux (lm)	3049.4

### Physical

Colour	Argent
Net weight (kg)	9.2
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.03
IP internal	20

### Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

### Photometric Files

ULD	↓ ZIP
LDT / IES	↓ LDT

### Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



## Photometric


Lighting type	Indirect, Direct
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95

## Electrical


Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240/48
LED voltage Vf (Vdc)	null
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

## Spare Parts

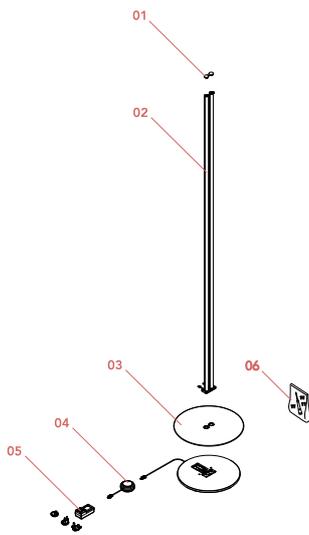


- |     |  |           |
|-----|--|-----------|
| 01. | Assembly Body Fixing for<br>Coordinates F Argent | RF31068   |
| 02. | Assembly Coordinates S Boby<br>Argent            | RF1800033 |
| 03. | Base Upper Cover                                 | RF31826   |
| 04. | Switch dimmer 48v pmw 500hz                      | RF27549   |
| 05. | Black plug assembly kit & 48V<br>driver          | RF3320400 |

**DOWNLOAD**



RF31068  
Assembly Body Fixing for  
Coordinates F Argent



RF1800033  
Assembly Coordinates S Boby  
Argent



RF31826  
Base Upper Cover



RF27549  
Switch dimmer 48v pmw 500hz



RF3320400  
Black plug assembly kit & 48V  
driver