



SuperArchimoon

Designed by Philippe Starck, 2000



Halogen - 250W

Floor lamp providing direct and diffused light. Acid-etched hand-blown pressed borosilicate glass internal diffuser. Plissé cloth external diffuser. Sand-cast, aluminum diffuser support. Gray painted assembly composed of tubular aluminum arms and tie rods, stainless steel springs, and die-cast aluminum joints. Sand-cast aluminum base with gray painted spun aluminum cover. On the cable there is the electronic dimmer which allows the regulation of light brightness.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

| Mounting Floor | |
|-------------------|---------------------|
| Environments | Indoor dry location |
| Light Source Type | Bulb |
| Lamp category | Halogen |
| Lamp holders | E27 |
| Ilcos | HSGS |
| Number of heads | 1 |
| Power (W) | 250 |

Physical

| Colour | Fabric |
|---------------------|--------|
| Length (mm) | 790 |
| Cord length (mm) | 1600 |
| Net weight (kg) | 90.88 |
| Package height (mm) | 0 |
| Package width (mm) | 0 |
| Package length (mm) | 0 |
| Package volume (m3) | 1.28 |
| IP internal | 20 |



| Download |
|----------|
|----------|

| ounting instructions | 业 | PDF |
|----------------------|-------------------|-----|
| pare Parts | $\overline{\bot}$ | PDF |

Photometric Files

LDT / IES

Μ



Technical Drawings





















https://professional.flos.com/en/global/product/superarchimoon-f6366020/

F6366020

Schematic light drawing



Photometric

| Lighting type | Indirect, Direct | |
|--------------------|------------------|--|
| Light distribution | Symmetric | |

Electrical

| Insulation class | II |
|----------------------|---|
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| LED voltage Vf (Vdc) | null |
| Dimmable | Yes |
| Dimming interface | Remote Dimmable (Dimmer Not Included) |
| Plug type | Type C |
| Batteries inside | No |





NOT INCLUDED

RF26998


LED 21W E27 2450lm 3000K DIMMER

NOT INCLUDED

......

LED Opal Lamp E27 21W 2700K A65 Dimmable

Spare Parts

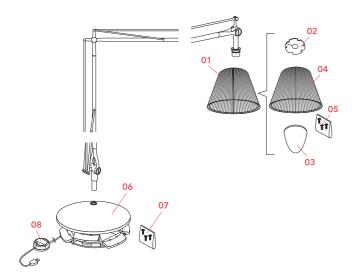

| 01. | Diffuser Assembly | F6372007 |
|-----|---------------------------------|-----------|
| 02. | Anti-dust screen | RF10277 |
| 03. | Acid-etched diffuser assembly | RF10442 |
| 04. | lvory shade | RF10023 |
| 05. | Bag with fixing elements for | RF6372100 |
| | diffuser | |
| 06. | Grey base cover | RF6372300 |
| 07. | Floor support bag kit | RF6372200 |
| 08. | Electrical wiring assembly with | RF29987 |
| | dimmer 1012s lfp | |

DOWNLOAD







RF10277
Anti-dust screen



Acid-etched diffuser assembly

RF10442



Ivory shade



Bag with fixing elements for diffuser



RF6372300





RF6372200

Floor support bag kit



RF29987

Electrical wiring assembly with dimmer 1012s lfp





Superarchimoon outdoor Green wall

Designed by Philippe Starck, 2000



Light source not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

| EAN | 8059607006320 | |
|-------------------------------|---------------|--|
| Mounting | Floor | |
| invironments Outdoor wet loca | | |
| Light Source Type | Bulb | |
| Lamp holders | E27 | |
| Ilcos | HSGS | |
| Number of heads | 1 | |
| Power (W) | 250 | |

Physical

| Colour | Green Wall | |
|---------------------|------------|--|
| Orientation | Adjustable | |
| Net weight (kg) | 160.3 | |
| Package volume (m3) | 1.46 | |
| IP internal | 55 | |
| IP external | 55 | |



Download

| ounting instructions | ⊥ PD |
|----------------------|--------------|
| ounting instructions | ,↓ PD |

Photometric Files

LDT / IES



Technical Drawings

| 2D | ⊥ ZIP |
|----|--------------|
| 3D | ⊥ ZIP |







Schematic light drawing



| Beam A | Angle DIR | : 74° |
|--------|-----------|-------|
| h(m) | E(lx) | D(m) |
| 1 | 88 | 1.50 |
| 2 | 22 | 3.01 |
| 3 | 10 | 4.51 |
| 4 | 6 | 6.02 |

5

7.52

Photometric

| Lighting type | Direct |
|------------------------|-----------|
| Light distribution | Symmetric |
| Beam angle C0-180 (°) | 74 |
| Beam angle C90-270 (°) | 74 |

Electrical

| Insulation class | II |
|--------------------|---|
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 220-240 |
| Dimmable | Yes |
| Dimming interface | Remote Dimmable (Dimmer Not Included) |
| Emergency type | No |
| Batteries inside | No |
| Charging min time | No |

Notes

Light source not included. HSGS E27: 1x250W or 1 LED: 21W - 2450 lm - 3000K We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.





NOT INCLUDED

RF26998

LED 21W E27 2450lm 3000K DIMMER

NOT INCLUDED

RF30429

LED Opal Lamp E27 21W 2700K A65 Dimmable



04. Floor support bag kit

RE6372200

https://professional.flos.com/en/global/product/superarchimoon-outdoor-green-wall-f6367041/



RF6372200

Floor support bag kit