

FLOS

 F6564031 Dark Green

Tab Floor

Designed by Edward Barber and Jay Osgerby, 2011

9W - 347lm - 2700K - CRI> 90



Floor luminaire providing direct lighting with adjustable head. Body in painted pressofused aluminium. Multi-led diffuser in specially designed PMMA to avoid the Multi Shadow effect and dazzle. Head rotation $\pm 90^\circ$.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607006580
Mounting	Floor
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	9
System flux (lm)	347

Physical

Colour	Dark Green
Length (mm)	240
Net weight (kg)	1.9
Package height (mm)	160
Package width (mm)	330
Package length (mm)	1210
Package volume (m3)	0.06
IP internal	20



Download

Mounting instructions	Download PDF
Mounting instructions	Download PDF
Spare Parts	Download PDF

Photometric Files


LDT / IES	Download LDT
-----------	------------------------------

Technical Drawings

2D	Download ZIP
3D	Download ZIP



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90

Electrical


Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240/24
LED voltage Vf (Vdc)	null
Driver	Remote included
Dimmable	No
Dimming type	Electronic 24V
Dimming interface	Switch Integrated (Not Dimmable)
Plug type	Type G, Type A, Type C
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

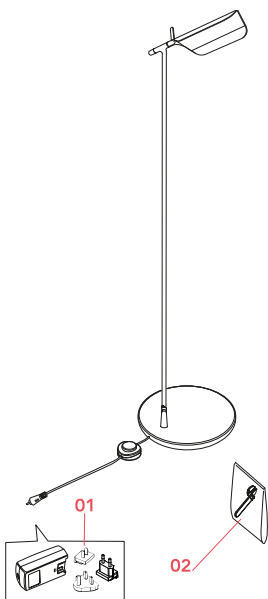

- 01. Black plug assembly kit & 24V driver RF3320100
- 02. Locking key tool RF13905

DOWNLOAD



RF3320100

Black plug assembly kit & 24V
driver



RF13905

Locking key tool