

Flamingo

Design by Antoni Arola

Displaying the elegant poise of the bird that inspired it, Flamingo projects a feeling of weightlessness hovering overhead. The deconstructed design separates the LED light source from its translucent shades, producing gradations of diffuse illumination.

Pendant

1510

Ø 70 cm



1527

Ø 90 cm




1530

Ø 90 cm



1540

Ø 70 cm

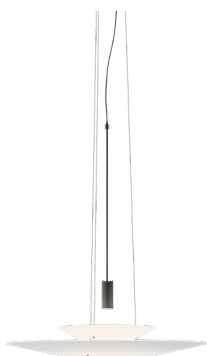

1550

Ø 90 cm



1560

Ø 90 cm




1570

Ø 90 cm



1510



Finishes
 18/ _ _ Graphite (RAL 7016)
 20/ _ _ Gold (Gold)
 67/ _ _ Copper (Copper)
 93/ _ _ White (RAL 9016)

LED Colour Temperature
 /1_ 2700 K - 1108,02 lm
 /3_ 3500 K - 1278,8 lm
 F
 CRI >90

Control

1510 _ _ / _ _

_ _ / _ 1 DALI-2
 _ _ / _ B Push; 1-10V
 _ _ / _ Z Casambi

Materials

Diffuser: PMMA.
 Body: Aluminum.
 Canopy and rods: Steel.

Light Source and electronics

2 x LED 5,6 W 500 mA
 Constant Current 500 mA
 110~240V 50/60Hz

Packaging


2 Boxes
 Total Vol 0,1320 m³
 Gross weight 8,7 Kg Net weight 7,8 Kg

Notes

Extra cable length.

LED IP20 CE UK ENE Bi-volt

1527



Finishes
 18/ _ _ Graphite (RAL 7016)
 20/ _ _ Gold (Gold)
 67/ _ _ Copper (Copper)
 93/ _ _ White (RAL 9016)

LED Colour Temperature
 /1_ 2700 K - 1108,02 lm
 /3_ 3500 K - 1278,8 lm
 F
 CRI >90

Control

1527 _ _ / _ _

_ _ / _ 1 DALI-2
 _ _ / _ B Push; 1-10V
 _ _ / _ Z Casambi

Materials

Diffuser: PMMA.
 Body: Aluminum.
 Canopy and rods: Steel.

Light Source and electronics

2 x LED 5,6 W 500 mA
 Constant Current 500 mA
 110~240V 50/60Hz

Packaging


1 Box 0,12 x 0,80 x 0,79 m
 Vol 0,0634 m³
 Gross weight 4,1 Kg Net weight 3,69 Kg

Notes

Extra cable length.

LED IP20 CE UK ENE Bi-volt

1530



Finishes
 18/ _ _ Graphite (RAL 7016)
 20/ _ _ Gold (Gold)
 67/ _ _ Copper (Copper)
 93/ _ _ White (RAL 9016)

LED Colour Temperature
 /1_ 2700 K - 1662,03 lm
 /3_ 3500 K - 1918,2 lm
 F
 CRI >90

Control

1530 _ _ / _ _

_ _ / _ 1 DALI-2
 _ _ / _ B Push; 1-10V
 _ _ / _ Z Casambi

Materials

Diffuser: PMMA.
 Body: Aluminum.
 Canopy and rods: Steel.

Light Source and electronics

3 x LED 5,6 W 500 mA
 Constant Current 500 mA
 220~240V 50/60Hz

Packaging


3 Boxes
 Total Vol 0,1520 m³
 Gross weight 10 Kg Net weight 7 Kg

Notes

Extra cable length.

LED IP20 CE UK ENE

1540



- Finishes**
- 18/ _ _ Graphite (RAL 7016)
 - 20/ _ _ Gold (Gold)
 - 67/ _ _ Copper (Copper)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 554,01 lm
/3 _ 3500 K - 639,4 lm

F

CRI >90

Control

1540 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ B Push; 1-10V
- _ _ / _ Z Casambi

Materials

Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics

1 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,0620 m³
Gross weight 6 Kg Net weight 4 Kg

Notes

Extra cable length.



1550



- Finishes**
- 18/ _ _ Graphite (RAL 7016)
 - 20/ _ _ Gold (Gold)
 - 67/ _ _ Copper (Copper)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm

F

CRI >90

Control

1550 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ B Push; 1-10V
- _ _ / _ Z Casambi

Materials

Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics


3 x LED 5,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging


3 Boxes
Total Vol 0,1520 m³
Gross weight 11,3 Kg Net weight 8,8 Kg

Notes

Extra cable length.



1560



- Finishes**
- 18/ _ _ Graphite (RAL 7016)
 - 20/ _ _ Gold (Gold)
 - 67/ _ _ Copper (Copper)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm

F

CRI >90

Control

1560 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ B Push; 1-10V
- _ _ / _ Z Casambi

Materials

Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics


3 x LED 5,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging


3 Boxes
Total Vol 0,1860 m³
Gross weight 12,7 Kg Net weight 10,2 Kg

Notes

Extra cable length.



1570

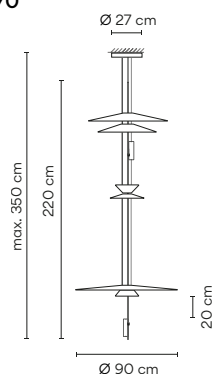

- Finishes**
- 18/ _ _ Graphite (RAL 7016)
 - 20/ _ _ Gold (Gold)
 - 67/ _ _ Copper (Copper)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 2216,04 lm
/3 _ 3500 K - 2557,6 lm

F

CRI >90

Control

1570 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ B Push; 1-10V
- _ _ / _ Z Casambi

Materials

Diffuser: PMMA. Shade: PMMA.
Body: Aluminum. Canopy and rods: Steel.

Light Source and electronics

4 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1633 m³
Gross weight 10 Kg Net weight 8,64 Kg

Notes

Extra cable length.

