

Puck Wall Art

Design by Jordi Vilardell

Puck Wall Art combines two circular wall lights of different sizes and colours, superimposed on top of one another, and combining to create a set of highly dynamic, sculptural compositions. The collection provides ambient indirect light and only requires a single electrical connection.

Wall



5470

Ø 30 cm



5471

Ø 40 cm



5472

Ø 45 cm




5474

Ø 46 cm




5476

Ø 60 cm




5480

58 x 58 x 6 cm



5481

69 x 69 x 9 cm




5485

68 x 68 x 9 cm




5487

87 x 87 x 9 cm

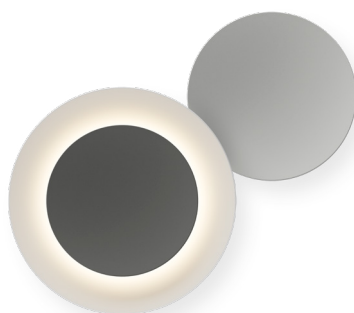

5486


87 x 87 x 11 cm

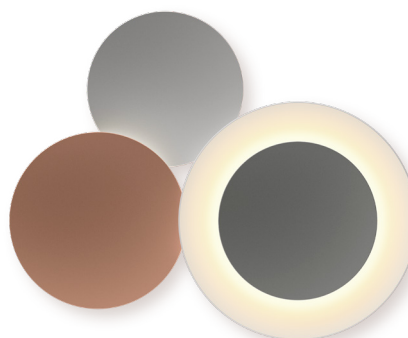

5491

103 x 84 x 11 cm

Each project is unique.
Personalise your own
Puck Wall Art composition
quick and easy.

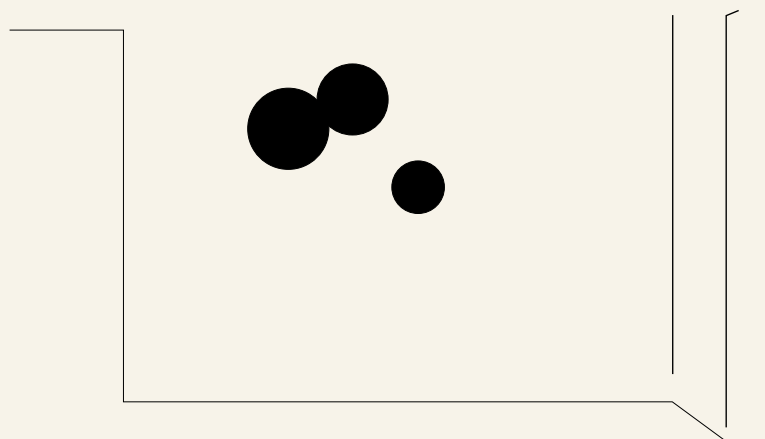

5470

Finishes

- 15/ __ Grey L2
(NCS S 2500-N)
- 21/ __ Black Grey
(NCS S 7000-N)
- 28/ __ Brown M1
(NCS S 4020-Y60R)

LED Colour Temperature

- /1 _ 2700 K - 952 lm
- /3 _ 3500 K - 1017 lm




CRI >90

Control

5970 __ / __

- __ / _ 1 DALI-2
- __ / _ 3 1-10V
- __ / _ 4 Triac
- __ / _ 5 Push
- __ / _ Z Casambi



Finishes

- 76/ __ Grey Felt L1
- 77/ __ Grey Felt D1

LED Colour Temperature

- /1 _ 2700 K - 952 lm
- /3 _ 3500 K - 1017 lm



CRI >90

Control

5970 __ / __

- __ / _ 1 DALI-2
- __ / _ 3 1-10V
- __ / _ 4 Triac
- __ / _ 5 Push
- __ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

- 1 x LED STRIP 8,4 W 700 mA
- Constant Current 700 mA
- / _ 1 110~240V 50/60Hz Bi-volt
- / _ 3 110~240V 50/60Hz Bi-volt
- / _ 5 110~240V 50/60Hz Bi-volt
- / _ 4 220~240V 50/60Hz
- / _ Z 220~240V 50/60Hz

Packaging


1 Box 0,34 x 0,34 x 0,23 m
Vol 0,0266 m³
Gross weight 2,6 Kg Net weight 1,6 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system



5471	Finishes		LED Colour Temperature		Control	
	15/ _ _ Grey L2 (NCS S 2500-N) 21/ _ _ Black Grey (NCS S 7000-N) 28/ _ _ Brown M1 (NCS S 4020-Y60R)		/1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E  CRI >90		5471 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi	



5471	Finishes		LED Colour Temperature		Control	
	76/ _ _ Grey Felt L1 77/ _ _ Grey Felt D1		/1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E  CRI >90		5471 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi	

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging


1 Box 0,44 x 0,44 x 0,25 m
Vol 0,0484 m³
Gross weight 3,5 Kg Net weight 1,9 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED  IP20     Bi-volt

5472	Finishes		LED Colour Temperature		Control	
	15/ _ _ Grey L2 (NCS S 2500-N) 21/ _ _ Black Grey (NCS S 7000-N) 28/ _ _ Brown M1 (NCS S 4020-Y60R)		/1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E  CRI >90		5472 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi	



5472	Finishes		LED Colour Temperature		Control	
	76/ _ _ Grey Felt L1 77/ _ _ Grey Felt D1		/1 _ 2700 K - 1435 lm /3 _ 3500 K - 1533 lm E  CRI >90		5472 _ _ / _ _ _ _ / _ 1 DALI-2 _ _ / _ 3 1-10V _ _ / _ 4 Triac _ _ / _ 5 Push _ _ / _ Z Casambi	

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging

1 Box 0,51 x 0,51 x 0,26 m
Vol 0,0676 m³
Gross weight 4,75 Kg Net weight 2,25 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED  IP20     Bi-volt

5474

- Finishes**
- 15/ __ Grey L2
(NCS S 2500-N)
 - 21/ __ Black Grey
(NCS S 7000-N)
 - 28/ __ Brown M1
(NCS S 4020-Y60R)

LED Colour Temperature

/1 _ 2700 K - 952 lm
/3 _ 3500 K - 1017 lm


E

CRI >90

Control

5474 __ / __

__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 4 Triac
__ / _ 5 Push
__ / _ Z Casambi



- Finishes**
- 71/ __ Grey Felt L1
& Grey Felt D1
 - 76/ __ Grey Felt L1

LED Colour Temperature

/1 _ 2700 K - 952 lm
/3 _ 3500 K - 1017 lm

E

CRI >90

Control

5474 __ / __

__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 4 Triac
__ / _ 5 Push
__ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
Constant Current 700 mA

/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging

1 Box 0,51 x 0,51 x 0,26 m
Vol 0,0676 m³
Gross weight 4,75 Kg Net weight 2,25 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE ENEC ENEC Bi-volt

5476

- Finishes**
- 15/ __ Grey L2
(NCS S 2500-N)
 - 21/ __ Black Grey
(NCS S 7000-N)
 - 28/ __ Brown M1
(NCS S 4020-Y60R)

LED Colour Temperature

/1 _ 2700 K - 1435 lm
/3 _ 3500 K - 1533 lm


E

CRI >90

Control

5476 __ / __

__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 4 Triac
__ / _ 5 Push
__ / _ Z Casambi



- Finishes**
- 71/ __ Grey Felt L1
& Grey Felt D1
 - 76/ __ Grey Felt L1

LED Colour Temperature

/1 _ 2700 K - 1435 lm
/3 _ 3500 K - 1533 lm

E

CRI >90

Control

5476 __ / __

__ / _ 1 DALI-2
__ / _ 3 1-10V
__ / _ 4 Triac
__ / _ 5 Push
__ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA

/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz


Packaging

1 Box 0,66 x 0,66 x 0,235 m
Vol 0,1024 m³
Gross weight 6,3 Kg Net weight 2,9 Kg

Notes


A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE ENEC ENEC Bi-volt

5480 	Finishes 15/ _ _ Grey L2 (NCS S 2500-N) 28/ _ _ Brown M1 (NCS S 4020-Y60R)
---	--

72/ _ _ Black Grey
& Grey L2
(NCS S 7000-N,
NCS S 2500-N)

5485



- Finishes**
- 72/ _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)
 - 73/ _ _ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature

/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm

E

CRI >90

Control

5485 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 4 Triac
_ _ / _ 5 Push
_ _ / _ Z Casambi

- Finishes**
- 71/ _ _ Grey Felt L1 & Grey Felt D1

LED Colour Temperature

/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm

E

CRI >90

Control

5485 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 4 Triac
_ _ / _ 5 Push
_ _ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics


1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging

1 Box 0,51 x 0,51 x 0,43 m
Vol 0,1118 m³
Gross weight 8,42 Kg Net weight 4,22 Kg

LED IP20 CE UK ENE Bi-volt

5486



- Finishes**
- 72/ _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)
 - 73/ _ _ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature

/1 _ 2700 K - 2871 lm
/3 _ 3500 K - 3067 lm

E

CRI >90

Control

5486 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 4 Triac
_ _ / _ 5 Push
_ _ / _ Z Casambi

- Finishes**
- 71/ _ _ Grey Felt L1 & Grey Felt D1

LED Colour Temperature

/1 _ 2700 K - 2871 lm
/3 _ 3500 K - 3067 lm

E

CRI >90

Control

5486 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 4 Triac
_ _ / _ 5 Push
_ _ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

2 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
Vol 0,2178 m³
Gross weight 11,35 Kg Net weight 5,45 Kg

LED IP20 CE UK ENE Bi-volt


5487

Finishes	LED Colour Temperature
● 21/ _ _ Black Grey (NCS S 7000-N)	/1 _ 2700 K - 2388 lm
● 73/ _ _ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)	/3 _ 3500 K - 2551 lm
	E 
	CRI >90

Control

5487 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 4 Triac
_ _ / _ 5 Push
_ _ / _ Z Casambi



Finishes	LED Colour Temperature
● 71/ _ _ Grey Felt L1 & Grey Felt D	/1 _ 2700 K - 2388 lm
	/3 _ 3500 K - 2551 lm
	E 
	CRI >90

Control

5487 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 4 Triac
_ _ / _ 5 Push
_ _ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
Vol 0,2178 m³
Gross weight 11,52 Kg Net weight 5,62 Kg

LED  IP20  CE  UK  ENEC  Bi-volt


5491

Finishes	LED Colour Temperature
● 72/ _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)	/1 _ 2700 K - 4307 lm
● 73/ _ _ Brown M1 & Black Grey (NCS S 4020-Y60R, NCS S 7000-N)	/3 _ 3500 K - 4601 lm
	E 
	CRI >90

Control

5491 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 4 Triac
_ _ / _ 5 Push
_ _ / _ Z Casambi



Finishes	LED Colour Temperature
● 71/ _ _ Grey Felt L1 & Grey Felt D1	/1 _ 2700 K - 4307 lm
	/3 _ 3500 K - 4601 lm
	E 
	CRI >90

Control

5491 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ 3 1-10V
_ _ / _ 4 Triac
_ _ / _ 5 Push
_ _ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

3 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,67 m
Vol 0,2919 m³
Gross weight 14,85 Kg Net weight 7,35 Kg

LED  IP20  CE  UK  ENEC  Bi-volt

