

FLOS

■ F0275000 Black

Noctambule Suspension 4 Low Cylinder Bowl

Designed by Konstantin Grcic, 2019


63W - 1579lm - 2700K - CRI> 90



Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

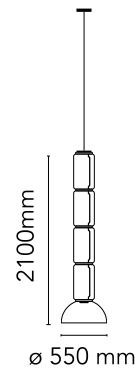

Main specifications

EAN	8059607000700
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	63
System flux (lm)	1579

Physical

Colour	Black
Length (mm)	250
Cord length (mm)	4000
Canopy dimension (mm)	46
Canopy width (mm)	185
Net weight (kg)	21.2
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.62
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Spare Parts



- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030 |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule Low Cylinder | F0254000 |
| 10. | Noctambule Bowl | F0255000 |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0254000
Noctambule Low Cylinder



F0255000
Noctambule Bowl

FLOS


■ F0264000 Black

Noctambule Suspension 3 High Cylinder

Designed by Konstantin Grcic, 2019

36W - 1202lm - 2700K - CRI> 90

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

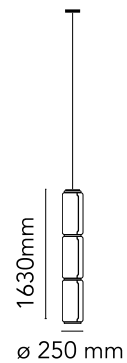

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607000557
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	36
System flux (lm)	1202

Physical

Colour	Black
Length (mm)	250
Cord length (mm)	4000
Canopy dimension (mm)	46
Canopy width (mm)	185
Net weight (kg)	14.9
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.26
IP internal	20

Download


Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP

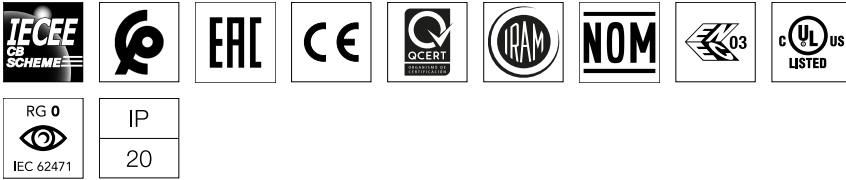

Schematic light drawing



Luminous flux luminaire
286 lm

Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts

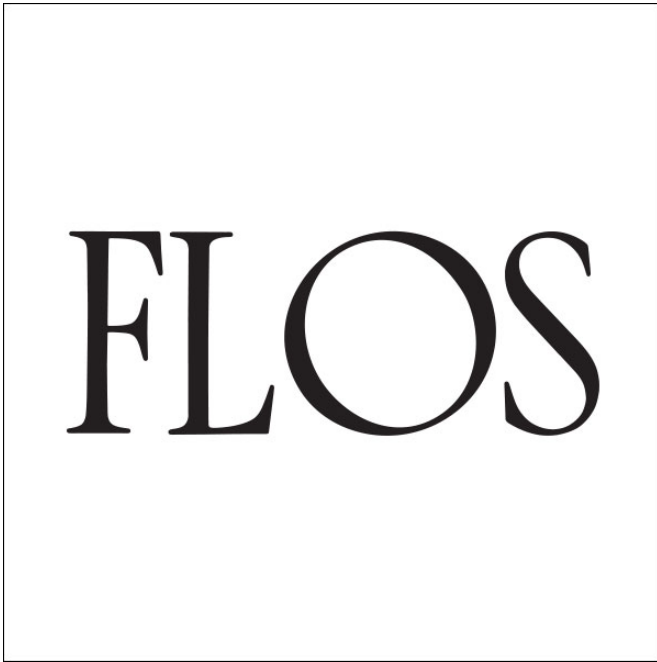

- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030 |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule High Cylinder | F0257000 |
| 08. | Terminal ring | F0258030 |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0257000
Noctambule High Cylinder



F0258030
Terminal ring

FLOS

■ F0281000 Black

Noctambule Suspension 5 High Cylinder

Designed by Konstantin Grcic, 2019




54W - 1798lm - 2700K

Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

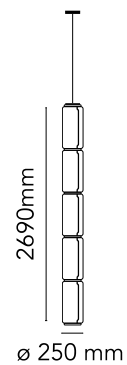

Main specifications

EAN	8059607000762
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	54
System flux (lm)	1798

Physical

Colour	Black
Length (mm)	250
Cord length (mm)	4000
Canopy dimension (mm)	46
Canopy width (mm)	185
Net weight (kg)	22.9
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.41
IP internal	20

Download

Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric


Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts



- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 04. | Suspension attack | F0253030 |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |
| 07. | Noctambule High Cylinder | F0257000 |
| 08. | Terminal ring | F0258030 |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



F0253030
Suspension attack



RF27498
Ring led diffuser



RF0254100
Fixing screws kit



F0257000
Noctambule High Cylinder



F0258030
Terminal ring

FLOS

■ F0268000 Black

Noctambule Suspension 1 Low Cylinder Cone

Designed by Konstantin Grcic, 2019


36W - 973lm - 2700K - CRI> 90



Hanging lamps consisting of interconnecting glass modules reaching a length of 3,2 mt. (126.77") with 4 mt. (157.48") suspended power cable. Cylindrical and semi-spherical transparent blown glass structure, suspended die cast aluminium ring connector, hydroformed steel internal lateral arm and injection moulded optical opal silicone outer ring diffusers. The power supply unit within the ceiling rose can be used as a dimmer to adjust the light intensity by 10% to 100% in either direction by means of the 0-10/1-10V, PUSH, DALI control.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

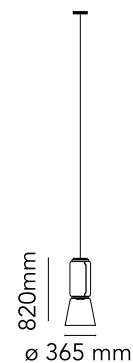

Main specifications

EAN	8059607000625
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	36
System flux (lm)	973

Physical

Colour	Black
Length (mm)	250
Cord length (mm)	4000
Canopy dimension (mm)	46
Canopy width (mm)	185
Net weight (kg)	10.2
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.21
IP internal	20

Download


Mounting instructions	↓ PDF
Mounting instructions	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-------

Technical Drawings

3D	↓ ZIP
🔒 Bim	↓ ZIP

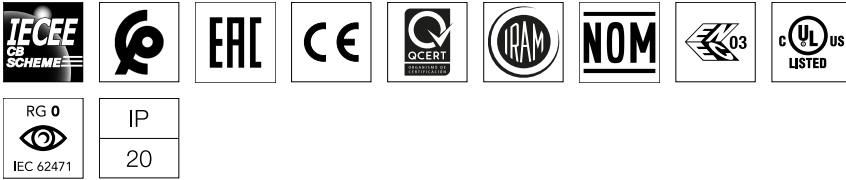

Schematic light drawing



Photometric



Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E



Spare Parts

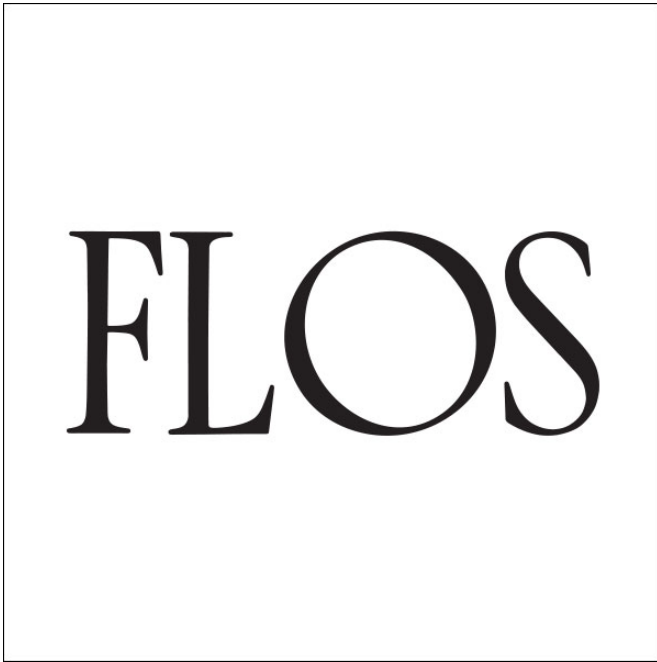

- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF0410300 |
| 03. | Noctambule ceiling rose cover | RF27422 |
| 05. | Ring led diffuser | RF27498 |
| 06. | Fixing screws kit | RF0254100 |

DOWNLOAD



RF0410500
Power supply kit for
Arrangements small &
Noctambule



RF0410300
Led dimmer kit



RF27422
Noctambule ceiling rose cover



RF27498
Ring led diffuser



RF0254100
Fixing screws kit