


FLOS

 F0002044 Gold


Skygarden 2

Designed by Marcel Wanders, 2007



Halogen - 205W

Suspension luminaire providing diffused lighting. Hemispherical, mechanically-processed cast plaster diffuser, painted white inside. Outer finish: rust, glossy black, glossy white or matte gold. Plaster diffuser support in die-cast aluminum alloy. Upper cable gland and blocking ring nut in black injection-molded PC. Shaped, adjustment screws. Transparent, injection-molded, upper and lower silicone shock absorbers. Lampholder and fixing support in PPS. Flashed and blown opal glass diffuser. Molded fixing ring nut in die-cast aluminum alloy with alodine plating. Frieze in photo-etched and mechanically drawn AISI 304 steel. Molded and galvanized steel ceiling attachment. Gray, injection-molded PC rose, painted the same color as the body.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607012925
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGS
Number of heads	1
Power (W)	205

Physical

Colour	Gold
Length (mm)	900
Cord length (mm)	2700
Net weight (kg)	29
Package height (mm)	680
Package width (mm)	1120
Package length (mm)	1120
Package volume (m3)	0.85
IP internal	20

Download

- [Mounting instructions](#)  PDF
- [Spare Parts](#)  PDF

Photometric Files

- [LDT / IES](#)  LDT


Technical Drawings

- [2D](#)  ZIP
- [3D](#)  ZIP
- [Bim](#)  ZIP



IP
20

Schematic light drawing



Beam Angle: 118°

h(m)	E(lx)	D(m)
1	729	3.36
2	182	6.72
3	81	10.08
4	46	13.44
5	29	16.79

Luminous flux luminaire
4210 lm


Photometric

Lighting type	Direct
Light distribution	Symmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Bulbs




NOT INCLUDED

RF29388

LED T46 Lamp E27 20W 2700K

Dimmable

Spare Parts

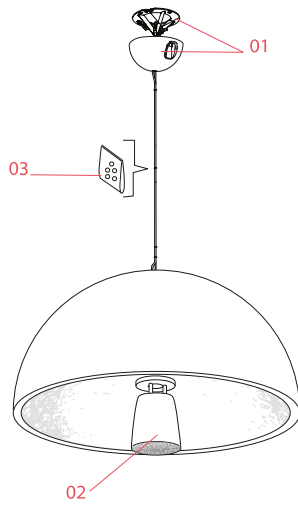

- | | | |
|-----|----------------------------|-----------|
| 01. | Gold ceiling rose assembly | RF6420244 |
| 02. | Glass diffuser assembly | RF6420100 |
| 03. | Kit of 5 or rings | RF05382 |

DOWNLOAD



RF6420244

Gold ceiling rose assembly



RF6420100

Glass diffuser assembly



RF05382

Kit of 5 or rings

FLOS

■ F0001031 Matte Black


Skygarden 1

Designed by Marcel Wanders, 2007



Halogen - 105W

Suspension luminaire providing diffused lighting. Hemispherical, mechanically-processed cast plaster diffuser, painted white inside. Outer finish: rust, glossy black, glossy white or matte gold. Plaster diffuser support in die-cast aluminum alloy, liquid-painted white. Molded upper bushing in die-cast, polished aluminum alloy, protected with transparent paint on the entire visible part. Upper cable gland and blocking ring nut in black injection-molded PC (polycarbonate). Shaped, galvanized adjustment screws. Transparent, injection-molded, upper and lower silicone shock absorbers. Lamp holder and fixing support in black injection-molded PPS (polyphenylene sulfide). Flashed and blown opal glass diffuser. Molded fixing ring nut in die-cast aluminum alloy with alodine plating. Skygarden 1 frieze in photo-etched and mechanically drawn AISI 304 steel. Molded and galvanized steel ceiling attachment Gray, injection-molded PA6 (Nylon) rose.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607012765
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	E27
Iicos	HSGS
Number of heads	1
Power (W)	105

Physical

Colour	Matte Black
Length (mm)	600
Cord length (mm)	2700
Net weight (kg)	13
Package height (mm)	435
Package width (mm)	730
Package length (mm)	730
Package volume (m3)	0.23
IP internal	20

Download

[Mounting instructions](#)  PDF

[Spare Parts](#)  PDF

Photometric Files

[LDT / IES](#)  LDT

Technical Drawings

[2D](#)  ZIP


[3D](#)  ZIP

[Bim](#)  ZIP



IP
20

Schematic light drawing



Beam Angle: 118°

h(m)	E(lx)	D(m)
1	416	3.36
2	104	6.72
3	46	10.08
4	26	13.44
5	17	16.79

Luminous flux luminaire
2400 lm


Photometric

Lighting type	Direct
Light distribution	Symmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Bulbs




NOT INCLUDED

RF29388

LED T46 Lamp E27 20W 2700K

Dimmable

Spare Parts

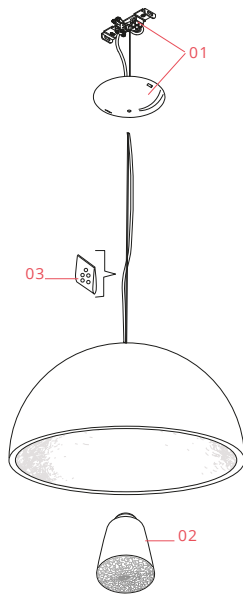

- | | | |
|-----|----------------------------------|-----------|
| 01. | Opal black ceiling rose assembly | RF6410431 |
| 02. | Skygarden 1 glass diffuser | RF6410100 |
| 03. | Kit of 5 or rings | RF05382 |

DOWNLOAD



RF6410431

Opal black ceiling rose assembly



RF6410100

Skygarden 1 glass diffuser



RF05382

Kit of 5 rings

FLOS

■ F6405031 Matte Black

Skygarden Small

Designed by Marcel Wanders, 2020



LED retrofit - 10W

Hanging lamp with diffuse light. Plaster dome with white interior and exterior finishes in the following colours: rust, shiny black, shiny white, or opaque gold. Dome support in aluminium alloy. Diffuser in blown milk glass. Decoration in photoengraved and deep drawn stainless steel. Polycarbonate rose in the same colour as the dome.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications


EAN	8059607034996
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	LED retrofit
Lamp type	T28
Lamp holders	E14
Bulb finish	Frosted
Number of heads	1
Power (W)	10
System power (W)	10

Physical

Colour	Matte Black
Length (mm)	400
Cord length (mm)	2700
Net weight (kg)	5
Package height (mm)	340
Package width (mm)	550
Package length (mm)	550
Package volume (m3)	0.1
IP internal	20



Download

[Mounting instructions](#)  PDF

[Spare Parts](#)  PDF

Photometric Files

[LDT / IES](#)  LDT


Technical Drawings

[3D](#)  ZIP

[Bim](#)  ZIP



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Bulbs



INCLUDED

RF32290


LED Lamp E14 8W 2700K T28



NOT INCLUDED

RF32291


LED Lamp E14 8W 3000K T28



NOT INCLUDED

RF32767

LED Lamp 9W E14 220-240V
2700K T28




NOT INCLUDED

RF32768

LED Lamp 9W E14 220-240V
3000K T28

Spare Parts

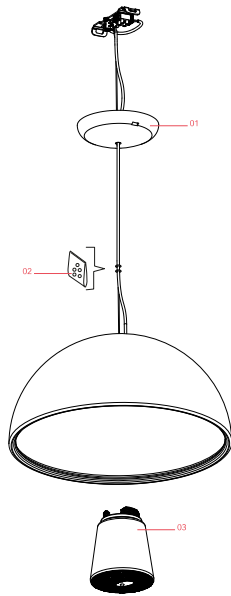

- 01. Opal black ceiling rose assembly RF6410431
- 03. Kit of 5 or rings RF05382

DOWNLOAD



RF6410431

Opal black ceiling rose assembly

RF05382

Kit of 5 or rings