


Wind

Design by Jordi Vilardell

A perfect marriage of technology and tradition. Wind's drum shade is made of fibreglass, an innovative webbed texture and pattern that elevates the visual contribution of this timeless silhouette.

Outdoor



4072

Ø 60 cm



4077

Ø 60 cm



4078

Ø 120 cm



4057

Ø 60 x 191 cm



4062


Ø 120 x 195 cm



4067

Ø 60 x 166 cm

4057



Finishes

- **27/** _ _ Sand (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature

/1_ 2700 K - 3299 lm
D >90

Control

4057 _ _ / 10 On/ Off

Materials

Shade: FG- Fibreglass. Weight: Concrete.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz


Packaging

2 Boxes
Total Vol 1,0300 m³
Gross weight 45,1 Kg Net weight 27,8 Kg


Notes

Portable version. Electric cable 1,5 m

LED IP64 CE UK ENE

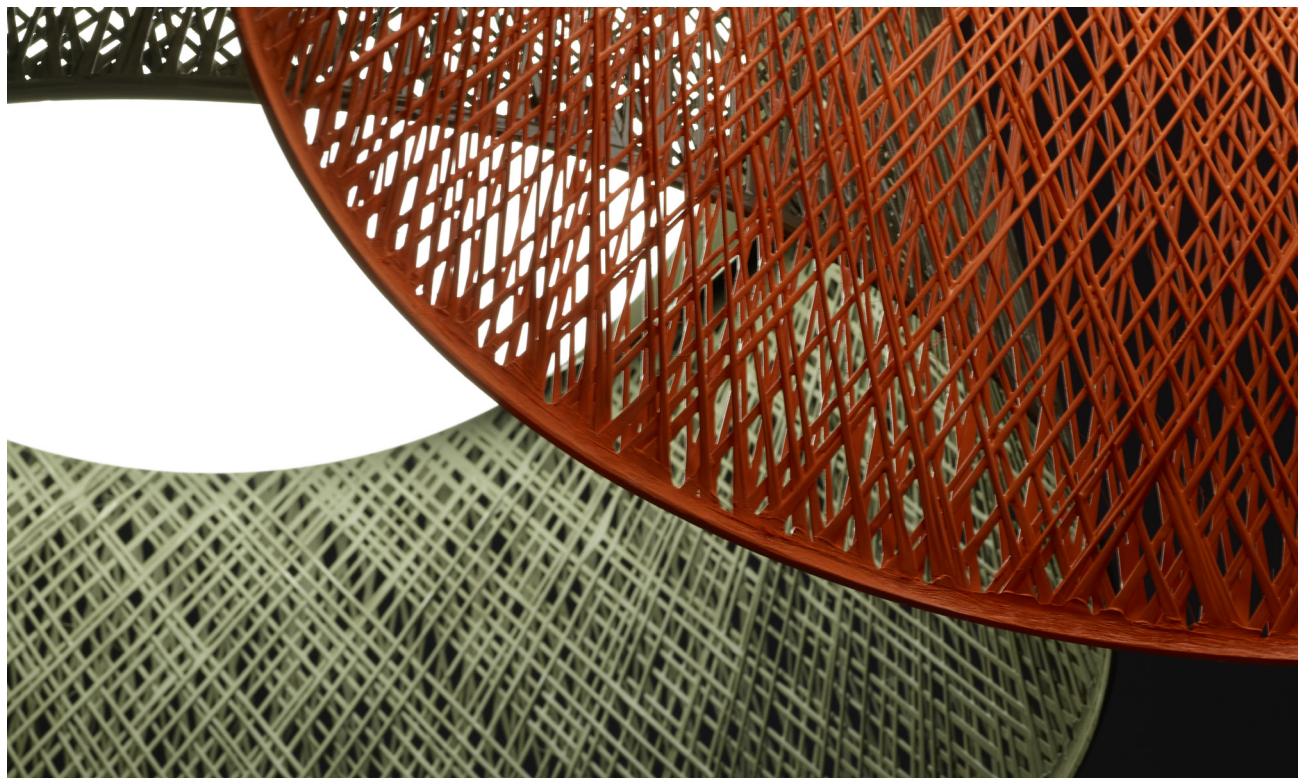

4062

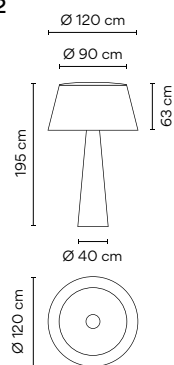

Finishes

- 27/ _ _ Sand (NCS S 1505-Y50R)
- 53/ _ _ Green M1 (NCS S 6005-G80Y)
- 61/ _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature

/1_ 2700 K - 3481 lm



CRI >90

Control

4062 _ _ / 10 On/ Off

Materials

Shade: FG- Fiberglass. Base: FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

4 x LED PLATE 14 W 500 mA
1 x LED 2,4 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging


4 Boxes
Total Vol 2,3500 m³
Gross weight 125,2 Kg Net weight 113,23 Kg

Notes

Portable version. Electric cable 2 m



4067



Finishes

- 27/ _ _ Sand (NCS S 1505-Y50R)
- 53/ _ _ Green M1 (NCS S 6005-G80Y)
- 61/ _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature

/1_ 2700 K - 3481 lm



CRI >90

Control

4067 _ _ / 10 On/ Off

Materials

Shade: FG- Fiberglass. Base: FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
1 x LED 2,4 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz




Packaging

3 Boxes
Total Vol 1,5000 m³
Gross weight 50 Kg Net weight 30,5 Kg

Notes

Portable version. Electric cable 1,5 m



4072		Finishes ● 27/ _ _ Sand (NCS S 1505-Y50R) ● 53/ _ _ Green M1 (NCS S 6005-G80Y) ● 61/ _ _ Ocre red (NCS S 3050-Y60R)	LED Colour Temperature /1_ 2700 K - 3299 lm D CRI >90	Control 4072 _ _ / 10 On/ Off
		Materials Shade: FG- Fiberglass. Canopy: Steel. Lid: Steel. Diffuser: PMMA. Light Source and electronics 1 x LED PLATE 25 W 700 mA Constant Current 700 mA 110-240V 50/60Hz	Packaging 1 Box 0,50 x 0,77 x 0,77 m Vol 0,2970 m ³ Gross weight 11,1 Kg Net weight 9,9 Kg Notes Surface mounted Extra cable length.	LED ⓘ IP65 CE UK ENEC
4077		Finishes ● 27/ _ _ Sand (NCS S 1505-Y50R) ● 53/ _ _ Green M1 (NCS S 6005-G80Y) ● 61/ _ _ Ocre red (NCS S 3050-Y60R)	LED Colour Temperature /1_ 2700 K - 3299 lm D CRI >90	Control 4077 _ _ / 10 On/ Off
		Materials Shade: FG- Fiberglass. Canopy: Steel. Lid: Steel. Diffuser: PMMA. Light Source and electronics 1 x LED PLATE 25 W 700 mA Constant Current 700 mA 110-240V 50/60Hz	Packaging 1 Box 0,67 x 0,67 x 0,62 m Vol 0,2970 m ³ Gross weight 11 Kg Net weight 9,9 Kg Notes Surface mounted Extra cable length.	LED ⓘ IP65 CE UK ENEC Dimmer Bi-volt
4078		Finishes ● 27/ _ _ Sand (NCS S 1505-Y50R) ● 53/ _ _ Green M1 (NCS S 6005-G80Y) ● 61/ _ _ Ocre red (NCS S 3050-Y60R)	LED Colour Temperature /1_ 2700 K - 3299 lm D CRI >90	Control 4078 _ _ / 10 On/ Off
		Materials Shade: FG- Fiberglass. Canopy: Steel. Lid: Steel. Diffuser: PMMA. Light Source and electronics 3 x LED PLATE 25 W 700 mA Constant Current 700 mA 110-240V 50/60Hz	Packaging 1 Box 0,74 x 1,24 x 1,27 m Vol 1,1300 m ³ Gross weight 38 Kg Net weight 30 Kg Notes Indoor only Extra cable length.	LED ⓘ IP20 CE UK ENEC Dimmer Bi-volt

